



**2-Port VoIP Gateway  
MODEL VG-20**




**Contents:**

- 1 VG-20 2-Port VoIP Gateway
- 1 RJ-45 Network Cable
- 2 RJ-11 Telephone Cables
- 1 12V Power Adapter

**Getting Connected:**

1. Disconnect your existing RJ-45 **Network Cable** from your computer and insert into the VG-20 port labeled WAN.
2. Connect one of the RJ-11 **Telephone Cables** into the TELCO wall jack (if applicable) and insert other end into port labeled LINE.
3. Connect your telephone into the port labeled PHONE1.
4. Connect your secondary telephone into the port labeled PHONE2 (if applicable).
5. Connect the supplied RJ-45 Network Cable into the port labeled ENET and insert the other end into your computer.
6. Plug in the Power Adapter to your wall outlet.

**Quick Start Guide**

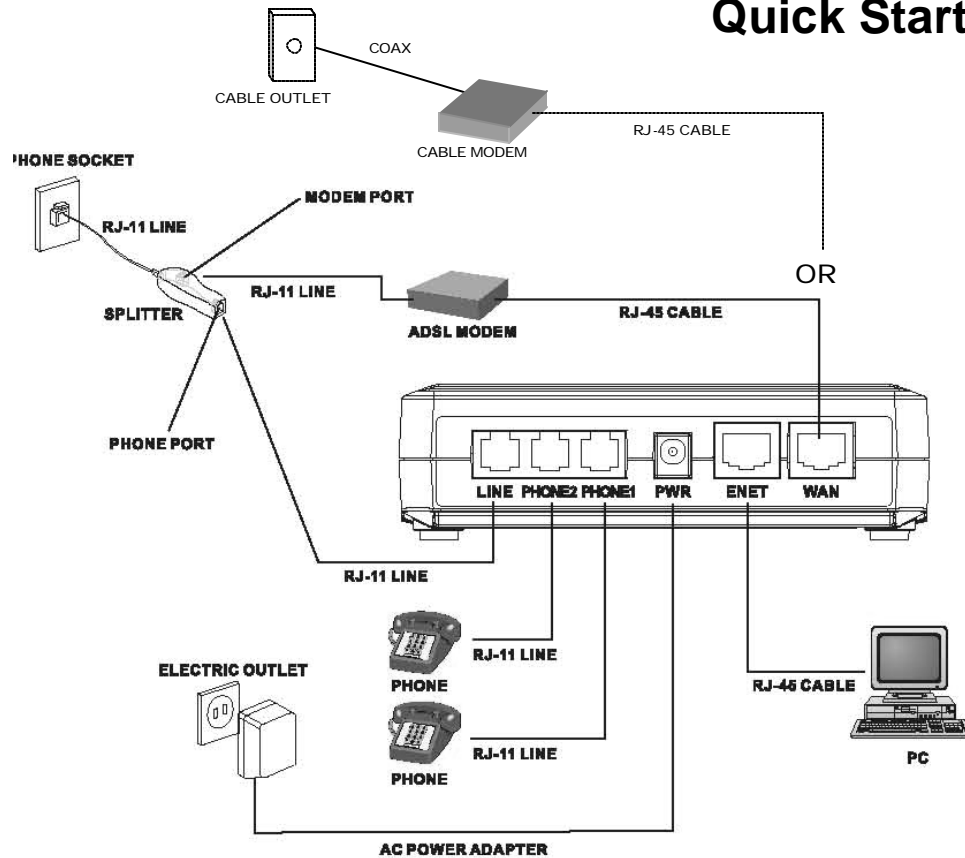

LED	COLOR	STATUS
PWR	Green	On
WAN	Green	Connected
ENET	Green	Connected
VoIP	Green	VoIP Enabled
Phone 1	Green	In Use
Phone 2	Green	In Use



PH: 1-800-819-9718  
Email: Support@aski.ca